IMPACT ACOUSTIC®

FACET

Wallcovering



TECHNICAL DATA SHEET

FACET 24MM

Wallcovering

FACET is an acoustic wall solution with a playful and dynamic pattern that creates intersecting lines forming geometric shapes that flows from one panel to the other. A continuous or a series pattern could be altered by inverting the panel alternately.

ARTICLE NUMBER


732.24.16.000.00

DIMENSIONS

Lenght: 1800mm 70.86" Width: 2400 mm 94.48" Thickness: 24mm 0.94"

CONNECTION

FACET is mounted on the wall with a biodegradable double-contact glue.

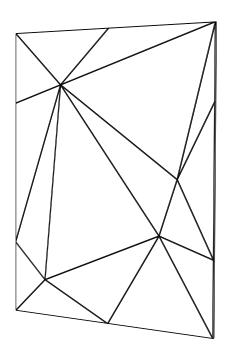

SIDE FRONT

FACET 12MM

Wallcovering

FACET is an acoustic wall solution with a playful and dynamic pattern that creates intersecting lines forming geometric shapes that flows from one panel to the other. A continuous or a series pattern could be altered by inverting the panel alternately.

ARTICLE NUMBER


732.12.16.000.00

DIMENSIONS

Lenght: 1200mm 47.24" Width: 2800 mm 110.23" Thickness: 12 mm 0.47"



FACET is mounted on the wall with a biodegradable double-contact glue.

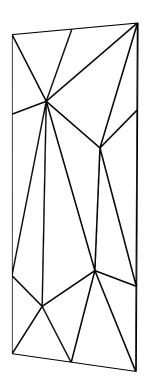

SIDE FRONT



ARCHISONIC® is a high-performancesustainable acoustic absorber made from upcyled plastic bottles which is Cradle to Cradle certified and LEED accredited.

ARCHISONIC® is manufactured at the highest quality standards, yet slight color and surface deviations caused by the high degree of recycled fiber are an inevitable part of the product characteristics and do not claim warranty services.

Material varies in colour when shown in monitor or in print. Please request a material sample to verify colours.


QUIET NEUTRALS

24 mm




WARM NEUTRALS

24 mm

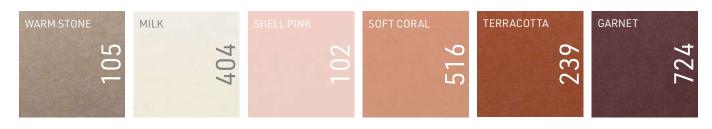


LIVING GREENS

24 mm

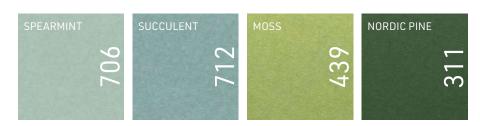

ELEMENTAL BLUES

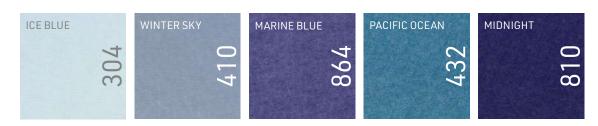

SOOTHING PASTELS

24 mm




ELEGANT DARKS

24 mm



ENERGETIC BRIGHTS

24 mm

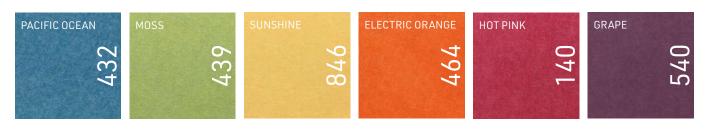

PRIMARY PLAY



DIMENSIONS

ARCHISONIC® 24 mm 1800 x 2400 x 24 mm (70" x 94" x 0.94") ARCHISONIC® 12 mm 1200 x 2800 x 12 mm (47" x 10" x 0.47")

COMPOSITION

100% PET (min. 60% post-consumer)

FIRE TEST

DIN EN 13501-1 B-s1, d0 ASTM E-84 Class A

VOC EMISSION

CDPH 01350 Pass

ISO 16000 (CDPH/EHLB/Standard Method V1.2.)

EN 16516

COLOUR FASTENESS

EN ISO 105-B02, A1 Grade 6


SOUND ABSORPTION

DIN ISO 11654

24 mm aw 0.55 (no airgap)

aw 0.65 (50 mm / 2" air gap) aw 0.90 (100 mm / 4" air gap) aw 0.95 (200 mm / 8" air gap) aw 0.95 (300 mm / 11" air gap).

12 mm aw 0.30 (no air gap)

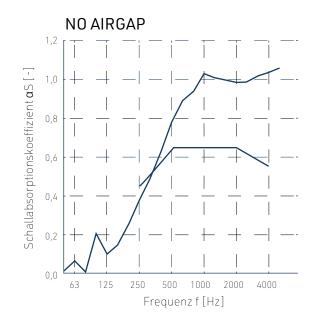

MATERIAL REUTILISATION

ARCHISONIC® 24 mm 88 plastic bottles/m² ARCHISONIC® 12 mm 53 plastic bottles/m²

ENVIRONMENTAL

Cradle to Cradle Certified™ Product qualifies for LEED v4 specifications on VOC emissions in LEED EQ credit (Low-emitting products)

SUPPORTED BY

Climate KIC












IMPACT ACOUSTIC®

FISHBONE Wall Tile

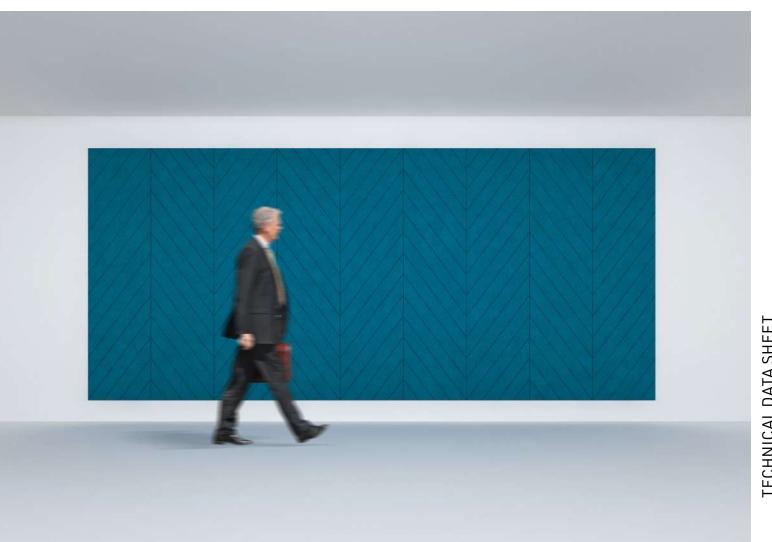

TECHNICAL DATA SHEET

TECHNICAL DATA SHEET

FISHBONE RIGHT 24MM

Wall Tile

FISHBONE is an acoustic wall solution with classic universal pattern that works with almost everywhere. It creates an endless interconnected and overlapping lines that give a space depth and movement.

ARTICLE NUMBER

731.24.15.000.00

DIMENSIONS

 Lenght:
 600mm
 23.62"

 Width:
 2400 mm
 94.48"

 Thickness:
 24mm
 0.94"


CONNECTION

FISHBONE is mounted on the wall with a biodegradable double-contact glue.



SIDE FRONT



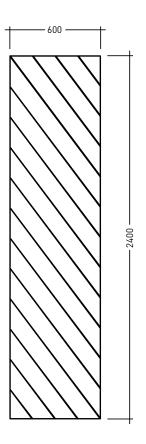

TECHNICAL DATA SHEET

FISHBONE LEFT 24MM

Wall Tile

FISHBONE is an acoustic wall solution with classic universal pattern that works with almost everywhere. It creates an endless interconnected and overlapping lines that give a space depth and movement.

ARTICLE NUMBER

731.24.16.000.00

DIMENSIONS

Lenght: 600mm 23.62" Width: 2400 mm 94.48" Thickness: 24mm 0.94"




FISHBONE is mounted on the wall with a biodegradable double-contact glue.



SIDE FRONT

24

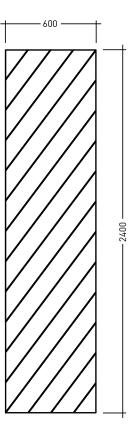

FISHBONE RIGHT 12MM

Wall Tile

FISHBONE is an acoustic wall solution with classic universal pattern that works with almost everywhere. It creates an endless interconnected and overlapping lines that give a space depth and movement.

ARTICLE NUMBER


731.12.15.000.00

DIMENSIONS

Lenght: 600mm 23.62" Width: 2800 mm 110.23" Thickness: 12mm 0.47"

CONNECTION

FISHBONE is mounted on the wall with a biodegradable double-contact glue.



SIDE FRONT

FISHBONE LEFT 12MM

Wall Tile

FISHBONE is an acoustic wall solution with classic universal pattern that works with almost everywhere. It creates an endless interconnected and overlapping lines that give a space depth and movement.

ARTICLE NUMBER


731.12.16.000.00

DIMENSIONS

Lenght: 600mm 23.62" Width: 2800 mm 110.23" Thickness: 12mm 0.47"


CONNECTION

FISHBONE is mounted on the wall with a biodegradable double-contact glue.



SIDE FRONT

1

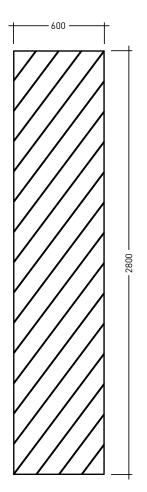



ARCHISONIC® is a high-performancesustainable acoustic absorber made from upcyled plastic bottles which is Cradle to Cradle certified and LEED accredited.

ARCHISONIC® is manufactured at the highest quality standards, yet slight color and surface deviations caused by the high degree of recycled fiber are an inevitable part of the product characteristics and do not claim warranty services.

Material varies in colour when shown in monitor or in print. Please request a material sample to verify colours.


QUIET NEUTRALS

24 mm




WARM NEUTRALS

24 mm

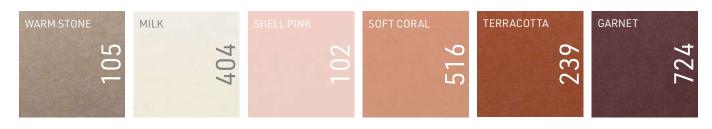

LIVING GREENS

24 mm

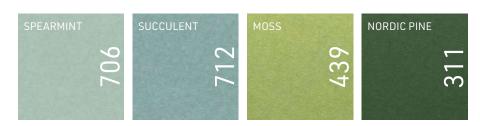

ELEMENTAL BLUES



TECHNICAL DATA SHEET

SOOTHING PASTELS

24 mm




ELEGANT DARKS

24 mm



ENERGETIC BRIGHTS

24 mm

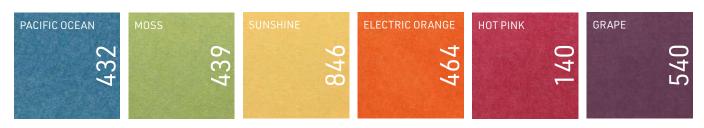

PRIMARY PLAY



DIMENSIONS

ARCHISONIC® 24 mm 1800 x 2400 x 24 mm (70" x 94" x 0.94") ARCHISONIC® 12 mm 1200 x 2800 x 12 mm (47" x 10" x 0.47")

COMPOSITION

100% PET (min. 60% post-consumer)

FIRE TEST

DIN EN 13501-1 B-s1, d0 ASTM E-84 Class A

VOC EMISSION

CDPH 01350 Pass

ISO 16000 (CDPH/EHLB/Standard Method V1.2.)

EN 16516

COLOUR FASTENESS

EN ISO 105-B02, A1 Grade 6


SOUND ABSORPTION

DIN ISO 11654

24 mm aw 0.55 (no airgap)

aw 0.65 (50 mm / 2" air gap) aw 0.90 (100 mm / 4" air gap) aw 0.95 (200 mm / 8" air gap) aw 0.95 (300 mm / 11" air gap).

12 mm aw 0.30 (no air gap)

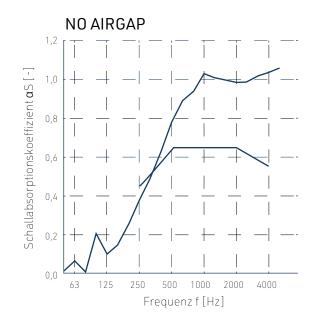

MATERIAL REUTILISATION

ARCHISONIC® 24 mm 88 plastic bottles/m² ARCHISONIC® 12 mm 53 plastic bottles/m²

ENVIRONMENTAL

Cradle to Cradle Certified™ Product qualifies for LEED v4 specifications on VOC emissions in LEED EQ credit (Low-emitting products)

SUPPORTED BY

Climate KIC












IMPACT ACOUSTIC®

FLOW

Wallcovering

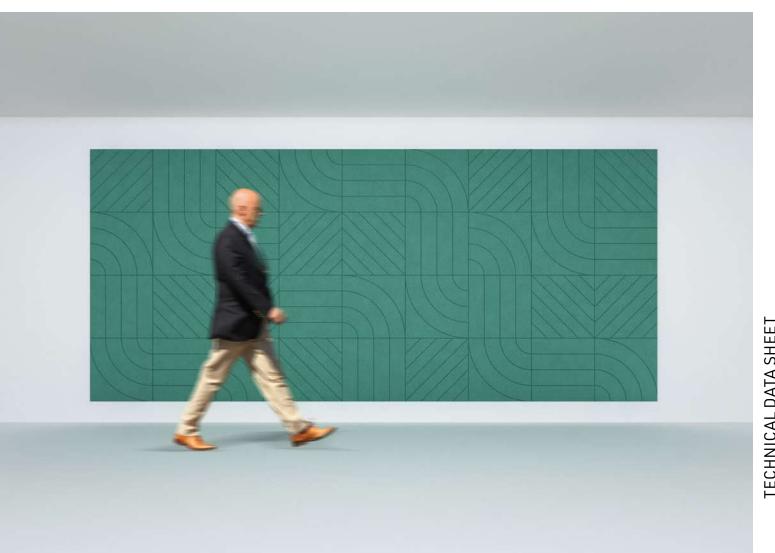

TECHNICAL DATA SHEET

FLOW 24MM

Wallcovering

FLOW is an acoustic wall solution with a playful and dynamic pattern that creates moving lines that flows from one panel to the other. A continuous or a series pattern could be altered by inverting the panel alternately.

ARTICLE NUMBER


732.24.11.000.00


DIMENSIONS

Lenght: 1800mm 70.86" Width: 2400 mm 94.48" Thickness: 24mm 0.94"



FLOW is mounted on the wall with a biodegradable double-contact glue.

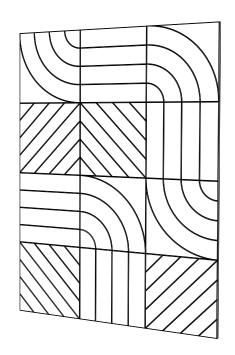

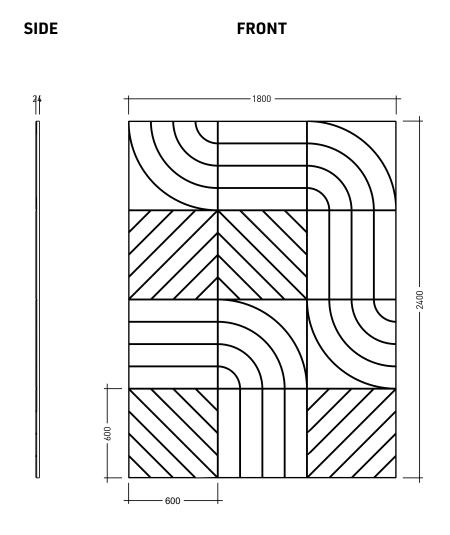

FLOW 12MM

Wallcovering

FLOW is an acoustic wall solution with a playful and dynamic pattern that creates moving lines that flows from one panel to the other. A continuous or a series pattern could be altered by inverting the panel alternately.

ARTICLE NUMBER


732.12.11.000.00


DIMENSIONS

Lenght: 1200mm 47.24" Width: 2800 mm 110.23" Thickness: 12 mm 0.47"



FLOW is mounted on the wall with a biodegradable double-contact glue.

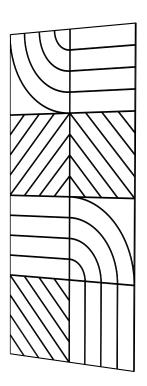

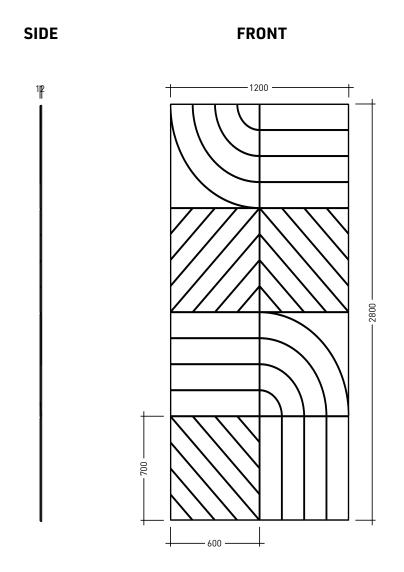



ARCHISONIC® is a high-performancesustainable acoustic absorber made from upcyled plastic bottles which is Cradle to Cradle certified and LEED accredited.

ARCHISONIC® is manufactured at the highest quality standards, yet slight color and surface deviations caused by the high degree of recycled fiber are an inevitable part of the product characteristics and do not claim warranty services.

Material varies in colour when shown in monitor or in print. Please request a material sample to verify colours.


QUIET NEUTRALS

24 mm




WARM NEUTRALS

24 mm

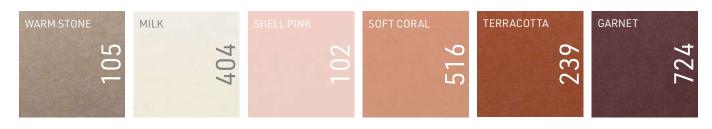


LIVING GREENS

24 mm

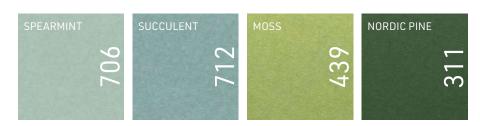

ELEMENTAL BLUES

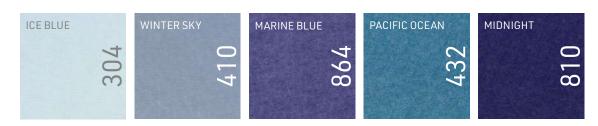

SOOTHING PASTELS

24 mm




ELEGANT DARKS

24 mm



ENERGETIC BRIGHTS

24 mm

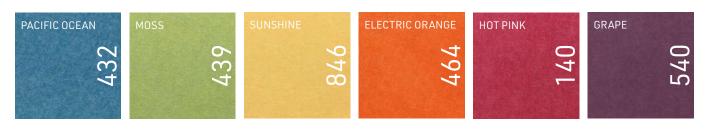

PRIMARY PLAY



DIMENSIONS

ARCHISONIC® 24 mm 1800 x 2400 x 24 mm (70" x 94" x 0.94") ARCHISONIC® 12 mm 1200 x 2800 x 12 mm (47" x 10" x 0.47")

COMPOSITION

100% PET (min. 60% post-consumer)

FIRE TEST

DIN EN 13501-1 B-s1, d0 ASTM E-84 Class A

VOC EMISSION

CDPH 01350 Pass

ISO 16000 (CDPH/EHLB/Standard Method V1.2.)

EN 16516

COLOUR FASTENESS

EN ISO 105-B02, A1 Grade 6


SOUND ABSORPTION

DIN ISO 11654

24 mm aw 0.55 (no airgap)

aw 0.65 (50 mm / 2" air gap) aw 0.90 (100 mm / 4" air gap) aw 0.95 (200 mm / 8" air gap) aw 0.95 (300 mm / 11" air gap).

12 mm aw 0.30 (no air gap)

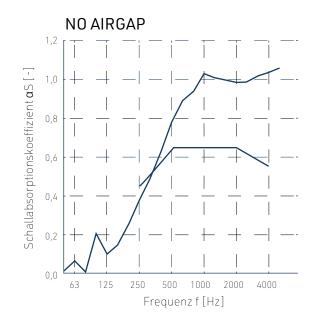

MATERIAL REUTILISATION

ARCHISONIC® 24 mm 88 plastic bottles/m² ARCHISONIC® 12 mm 53 plastic bottles/m²

ENVIRONMENTAL

Cradle to Cradle Certified™ Product qualifies for LEED v4 specifications on VOC emissions in LEED EQ credit (Low-emitting products)

SUPPORTED BY

Climate KIC











IMPACT ACOUSTIC®

GATSBY

Wallcovering



TECHNICAL DATA SHEET

GATSBY 24MM

Wallcovering

GATSBY is an acoustic wall solution with a playful and dynamic pattern that creates intersecting lines forming geometric shapes that flows from one panel to the other. A continuous or a series pattern could be altered by inverting the panel alternately.

ARTICLE NUMBER


732.24.19.000.00

DIMENSIONS

Lenght: 1800mm 70.86" Width: 2400 mm 94.48" Thickness: 24mm 0.94"



GATSBY is mounted on the wall with a biodegradable double-contact glue.

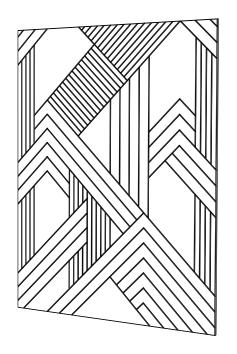

FRONT THE STATE OF THE STATE O

WALLCOVERING

GATSBY 12MM

GATSBY is an acoustic wall solution with a playful and dynamic pattern that creates intersecting lines forming geometric shapes that flows from one panel to the other. A continuous or a series pattern could be altered by inverting the panel alternately.

ARTICLE NUMBER


732.12.19.000.00

DIMENSIONS


Lenght: 47.24" 1200mm Width: 110.23" 2800 mm 12 mm 0.47" Thickness:


CONNECTION

GATSBY is mounted on the wall with a biodegradable double-contact glue.

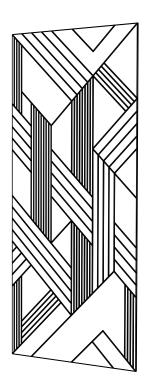

SIDE **FRONT**



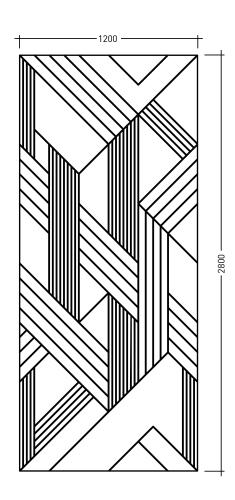



ARCHISONIC® is a high-performancesustainable acoustic absorber made from upcyled plastic bottles which is Cradle to Cradle certified and LEED accredited.

ARCHISONIC® is manufactured at the highest quality standards, yet slight color and surface deviations caused by the high degree of recycled fiber are an inevitable part of the product characteristics and do not claim warranty services.

Material varies in colour when shown in monitor or in print. Please request a material sample to verify colours.


QUIET NEUTRALS

24 mm




WARM NEUTRALS

24 mm

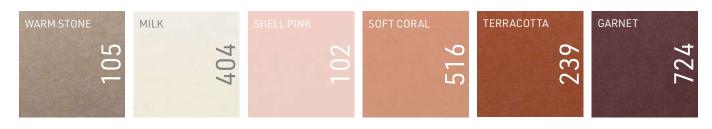


LIVING GREENS

24 mm

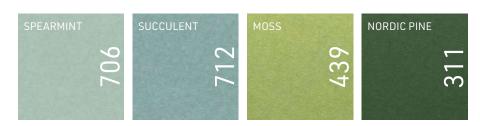

ELEMENTAL BLUES

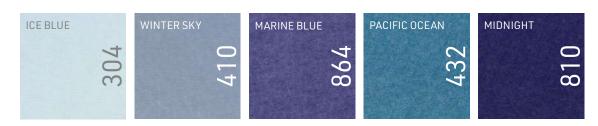

SOOTHING PASTELS

24 mm




ELEGANT DARKS

24 mm



ENERGETIC BRIGHTS

24 mm

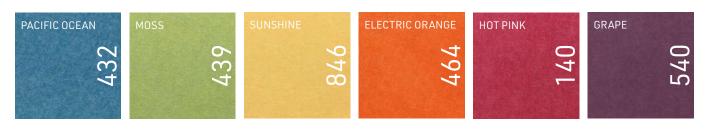

PRIMARY PLAY



DIMENSIONS

ARCHISONIC® 24 mm 1800 x 2400 x 24 mm (70" x 94" x 0.94") ARCHISONIC® 12 mm 1200 x 2800 x 12 mm (47" x 10" x 0.47")

COMPOSITION

100% PET (min. 60% post-consumer)

FIRE TEST

DIN EN 13501-1 B-s1, d0 ASTM E-84 Class A

VOC EMISSION

CDPH 01350 Pass

ISO 16000 (CDPH/EHLB/Standard Method V1.2.)

EN 16516

COLOUR FASTENESS

EN ISO 105-B02, A1 Grade 6


SOUND ABSORPTION

DIN ISO 11654

24 mm aw 0.55 (no airgap)

aw 0.65 (50 mm / 2" air gap) aw 0.90 (100 mm / 4" air gap) aw 0.95 (200 mm / 8" air gap) aw 0.95 (300 mm / 11" air gap).

12 mm aw 0.30 (no air gap)

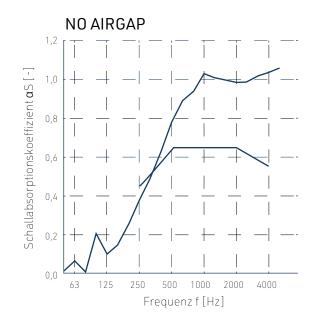

MATERIAL REUTILISATION

ARCHISONIC® 24 mm 88 plastic bottles/m² ARCHISONIC® 12 mm 53 plastic bottles/m²

ENVIRONMENTAL

Cradle to Cradle Certified™ Product qualifies for LEED v4 specifications on VOC emissions in LEED EQ credit (Low-emitting products)

SUPPORTED BY

Climate KIC












IMPACT ACOUSTIC®

HEXAGON Wall Tile

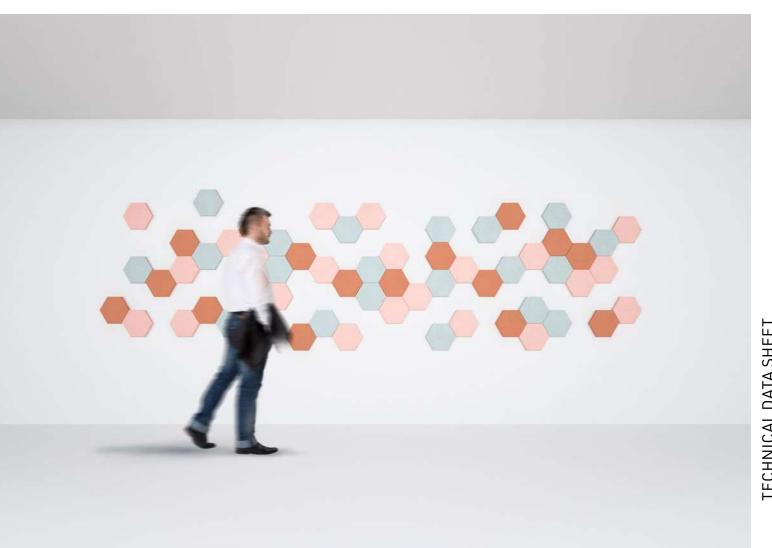

TECHNICAL DATA SHEET

HEXAGON 24MM

Wall Tile


HEXAGON is a playful and highly adaptable acoustic solution. A classic shape that can create a wide variety of patterns and moods specially when complimentary colours are combined.

ARTICLE NUMBER

731.24.20.000.00

DIMENSIONS

Lenght: 295mm 11.61" Width: 255 mm 10.03" Thickness: 24mm 0.94"




CONNECTION

HEXAGON is mounted on the wall with a biodegradable double-contact glue.

SIDE FRONT





HEXAGON 12MM

Wall Tile


HEXAGON is a playful and highly adaptable acoustic solution. A classic shape that can create a wide variety of patterns and moods specially when complimentary colours are combined.

ARTICLE NUMBER

731.12.20.000.00

DIMENSIONS

Lenght: 295mm 11.61" Width: 255 mm 10.03" Thickness: 12 mm 0.47"




CONNECTION

HEXAGON is mounted on the wall with a biodegradable double-contact glue.

SIDE FRONT







ARCHISONIC® is a high-performancesustainable acoustic absorber made from upcyled plastic bottles which is Cradle to Cradle certified and LEED accredited.

ARCHISONIC® is manufactured at the highest quality standards, yet slight color and surface deviations caused by the high degree of recycled fiber are an inevitable part of the product characteristics and do not claim warranty services.

Material varies in colour when shown in monitor or in print. Please request a material sample to verify colours.


QUIET NEUTRALS

24 mm




WARM NEUTRALS

24 mm

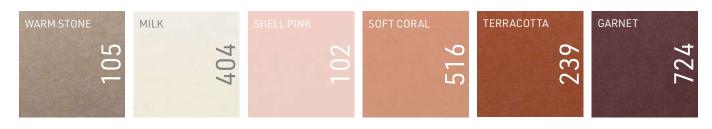


LIVING GREENS

24 mm

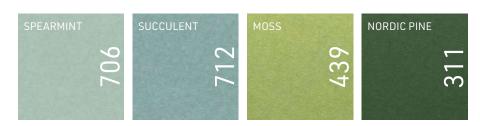

ELEMENTAL BLUES

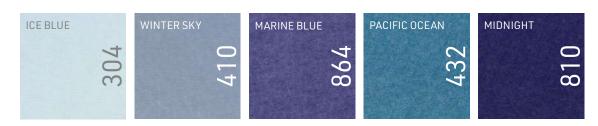

SOOTHING PASTELS

24 mm




ELEGANT DARKS

24 mm



ENERGETIC BRIGHTS

24 mm

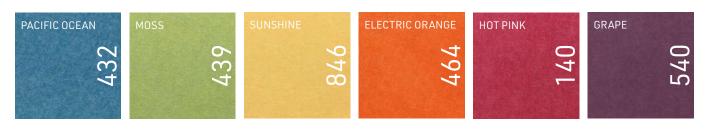

PRIMARY PLAY



DIMENSIONS

ARCHISONIC® 24 mm 1800 x 2400 x 24 mm (70" x 94" x 0.94") ARCHISONIC® 12 mm 1200 x 2800 x 12 mm (47" x 10" x 0.47")

COMPOSITION

100% PET (min. 60% post-consumer)

FIRE TEST

DIN EN 13501-1 B-s1, d0 ASTM E-84 Class A

VOC EMISSION

CDPH 01350 Pass

ISO 16000 (CDPH/EHLB/Standard Method V1.2.)

EN 16516

COLOUR FASTENESS

EN ISO 105-B02, A1 Grade 6


SOUND ABSORPTION

DIN ISO 11654

24 mm aw 0.55 (no airgap)

aw 0.65 (50 mm / 2" air gap) aw 0.90 (100 mm / 4" air gap) aw 0.95 (200 mm / 8" air gap) aw 0.95 (300 mm / 11" air gap).

12 mm aw 0.30 (no air gap)

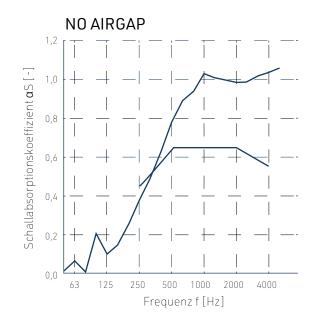

MATERIAL REUTILISATION

ARCHISONIC® 24 mm 88 plastic bottles/m² ARCHISONIC® 12 mm 53 plastic bottles/m²

ENVIRONMENTAL

Cradle to Cradle Certified™ Product qualifies for LEED v4 specifications on VOC emissions in LEED EQ credit (Low-emitting products)

SUPPORTED BY

Climate KIC











IMPACT ACOUSTIC®

KINGS CROSS

Wallcovering



TECHNICAL DATA SHEET

KINGS CROSS 24MM

Wallcovering

KINGS CROSS is an acoustic wall solution with classic universal pattern that works with almost everywhere. It creates an endless interconnected and overlapping lines that give a space depth and movement.

ARTICLE NUMBER


732.24.12.000.00


DIMENSIONS

Lenght: 1800mm 70.86" Width: 2400 mm 94.48" Thickness: 24mm 0.94"



KINGS CROSS is mounted on the wall with a biodegradable double-contact glue.

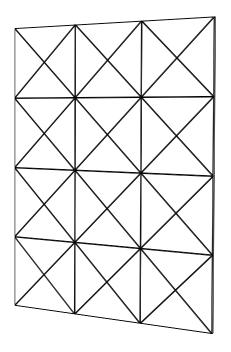

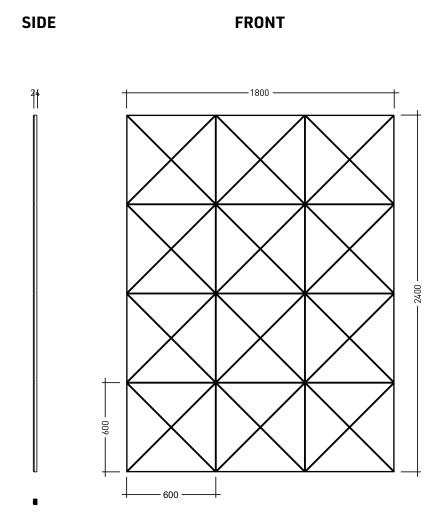

KINGS CROSS 12MM

Wallcovering

KINGS CROSS is an acoustic wall solution with classic universal pattern that works with almost everywhere. It creates an endless interconnected and overlapping lines that give a space depth and movement.

ARTICLE NUMBER


732.12.12.000.00


DIMENSIONS

Lenght: 1200mm 47.24" Width: 2800 mm 110.23" Thickness: 12 mm 0.47"



KINGS CROSS is mounted on the wall with a biodegradable double-contact glue.

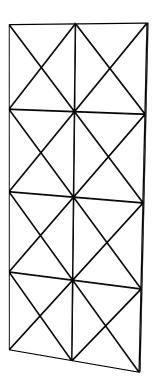

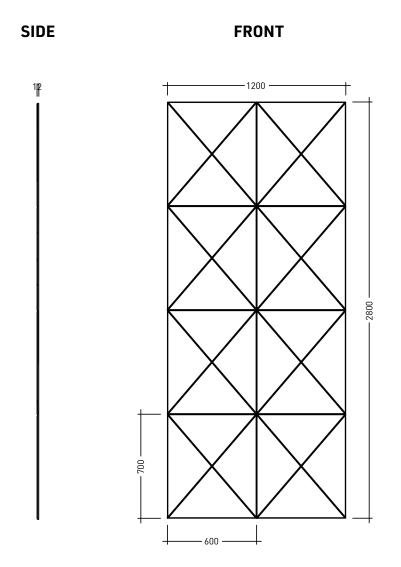



ARCHISONIC® is a high-performancesustainable acoustic absorber made from upcyled plastic bottles which is Cradle to Cradle certified and LEED accredited.

ARCHISONIC® is manufactured at the highest quality standards, yet slight color and surface deviations caused by the high degree of recycled fiber are an inevitable part of the product characteristics and do not claim warranty services.

Material varies in colour when shown in monitor or in print. Please request a material sample to verify colours.


QUIET NEUTRALS

24 mm




WARM NEUTRALS

24 mm

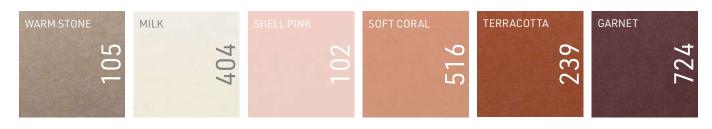


LIVING GREENS

24 mm

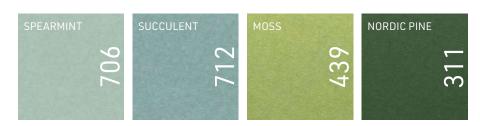

ELEMENTAL BLUES

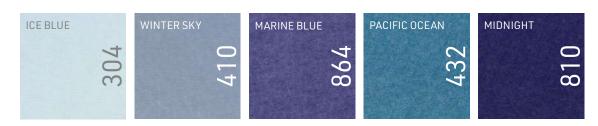

SOOTHING PASTELS

24 mm




ELEGANT DARKS

24 mm



ENERGETIC BRIGHTS

24 mm

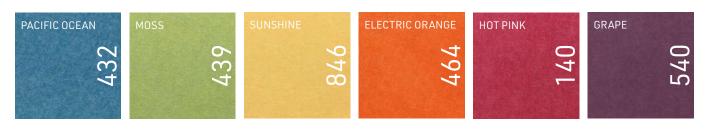

PRIMARY PLAY



DIMENSIONS

ARCHISONIC® 24 mm 1800 x 2400 x 24 mm (70" x 94" x 0.94") ARCHISONIC® 12 mm 1200 x 2800 x 12 mm (47" x 10" x 0.47")

COMPOSITION

100% PET (min. 60% post-consumer)

FIRE TEST

DIN EN 13501-1 B-s1, d0 ASTM E-84 Class A

VOC EMISSION

CDPH 01350 Pass

ISO 16000 (CDPH/EHLB/Standard Method V1.2.)

EN 16516

COLOUR FASTENESS

EN ISO 105-B02, A1 Grade 6


SOUND ABSORPTION

DIN ISO 11654

24 mm aw 0.55 (no airgap)

aw 0.65 (50 mm / 2" air gap) aw 0.90 (100 mm / 4" air gap) aw 0.95 (200 mm / 8" air gap) aw 0.95 (300 mm / 11" air gap).

12 mm aw 0.30 (no air gap)

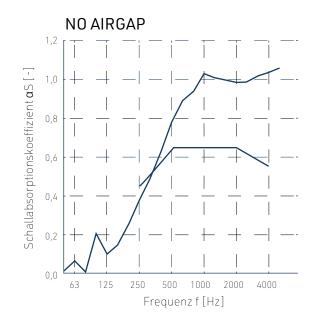

MATERIAL REUTILISATION

ARCHISONIC® 24 mm 88 plastic bottles/m² ARCHISONIC® 12 mm 53 plastic bottles/m²

ENVIRONMENTAL

Cradle to Cradle Certified™ Product qualifies for LEED v4 specifications on VOC emissions in LEED EQ credit (Low-emitting products)

SUPPORTED BY

Climate KIC











IMPACT ACOUSTIC®

MAZE Wallcovering



TECHNICAL DATA SHEET

MAZE 24MM

Wallcovering

MAZE is an acoustic wall solution with a playful and dynamic pattern that creates intersecting lines forming geometric shapes that flows from one panel to the other. A continuous or a series pattern could be altered by inverting the panel alternately.

ARTICLE NUMBER


732.24.18.000.00


DIMENSIONS

Lenght: 1800mm 70.86" Width: 2400 mm 94.48" Thickness: 24mm 0.94"

CONNECTION

MAZE is mounted on the wall with a biodegradable double-contact glue.

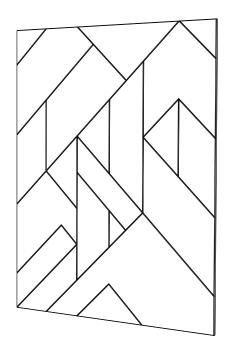

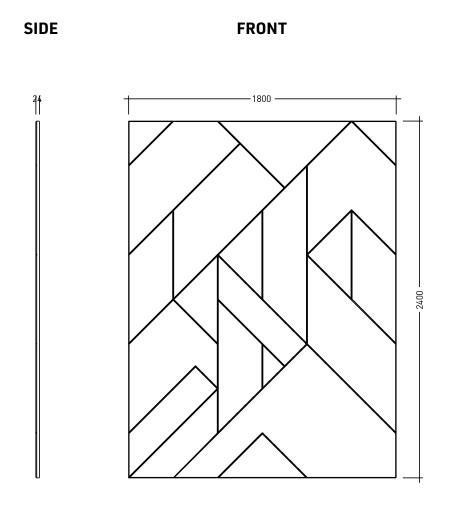

MAZE 12MM

Wallcovering

MAZE is an acoustic wall solution with a playful and dynamic pattern that creates intersecting lines forming geometric shapes that flows from one panel to the other. A continuous or a series pattern could be altered by inverting the panel alternately.

ARTICLE NUMBER


732.12.18.000.00

DIMENSIONS

Lenght: 1200mm 47.24" Width: 2800 mm 110.23" Thickness: 12 mm 0.47"



MAZE is mounted on the wall with a biodegradable double-contact glue.

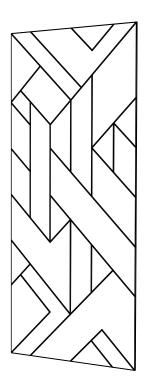



ARCHISONIC® is a high-performancesustainable acoustic absorber made from upcyled plastic bottles which is Cradle to Cradle certified and LEED accredited.

ARCHISONIC® is manufactured at the highest quality standards, yet slight color and surface deviations caused by the high degree of recycled fiber are an inevitable part of the product characteristics and do not claim warranty services.

Material varies in colour when shown in monitor or in print. Please request a material sample to verify colours.


QUIET NEUTRALS

24 mm




WARM NEUTRALS

24 mm

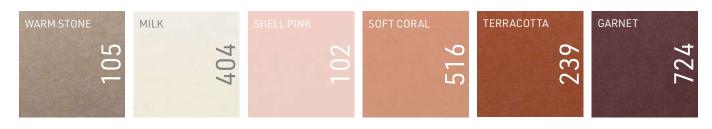


LIVING GREENS

24 mm

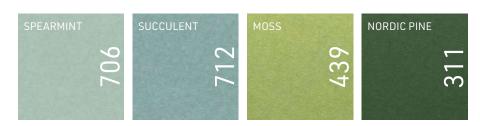

ELEMENTAL BLUES

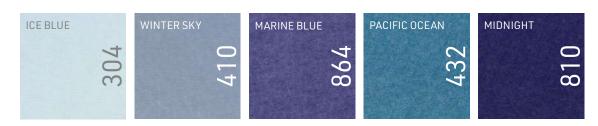

SOOTHING PASTELS

24 mm




ELEGANT DARKS

24 mm



ENERGETIC BRIGHTS

24 mm

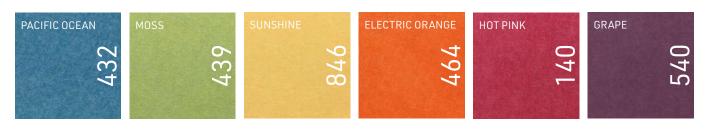

PRIMARY PLAY



DIMENSIONS

ARCHISONIC® 24 mm 1800 x 2400 x 24 mm (70" x 94" x 0.94") ARCHISONIC® 12 mm 1200 x 2800 x 12 mm (47" x 10" x 0.47")

COMPOSITION

100% PET (min. 60% post-consumer)

FIRE TEST

DIN EN 13501-1 B-s1, d0 ASTM E-84 Class A

VOC EMISSION

CDPH 01350 Pass

ISO 16000 (CDPH/EHLB/Standard Method V1.2.)

EN 16516

COLOUR FASTENESS

EN ISO 105-B02, A1 Grade 6


SOUND ABSORPTION

DIN ISO 11654

24 mm aw 0.55 (no airgap)

aw 0.65 (50 mm / 2" air gap) aw 0.90 (100 mm / 4" air gap) aw 0.95 (200 mm / 8" air gap) aw 0.95 (300 mm / 11" air gap).

12 mm aw 0.30 (no air gap)

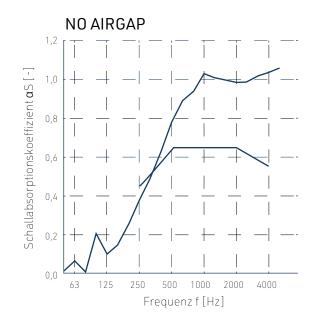

MATERIAL REUTILISATION

ARCHISONIC® 24 mm 88 plastic bottles/m² ARCHISONIC® 12 mm 53 plastic bottles/m²

ENVIRONMENTAL

Cradle to Cradle Certified™ Product qualifies for LEED v4 specifications on VOC emissions in LEED EQ credit (Low-emitting products)

SUPPORTED BY

Climate KIC











IMPACT ACOUSTIC®

PRISMA

Wallcovering



PRISMA 24MM

Wallcoverind

PRISMA is an acoustic wall solution with a playful and dynamic pattern that creates intersecting lines forming geometric shapes that flows from one panel to the other. A continuous or a series pattern could be altered by inverting the panel alternately.

ARTICLE NUMBER


732.24.16.000.00

DIMENSIONS

Lenght: 1800mm 70.86" Width: 2400 mm 94.48" Thickness: 24mm 0.94"

CONNECTION

PRISMA is mounted on the wall with a biodegradable double-contact glue.

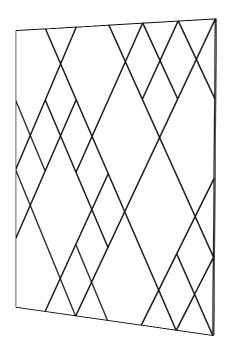

PRISMA 12MM

Wallcoverind

PRISMA is an acoustic wall solution with a playful and dynamic pattern that creates intersecting lines forming geometric shapes that flows from one panel to the other. A continuous or a series pattern could be altered by inverting the panel alternately.

ARTICLE NUMBER


732.12.16.000.00

DIMENSIONS

Lenght: 1200mm 47.24" Width: 2800 mm 110.23" Thickness: 12 mm 0.47"




PRISMA is mounted on the wall with a biodegradable double-contact glue.

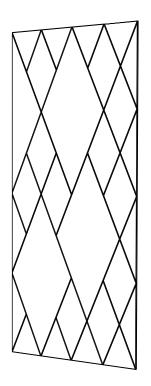

SIDE FRONT

1||2 |

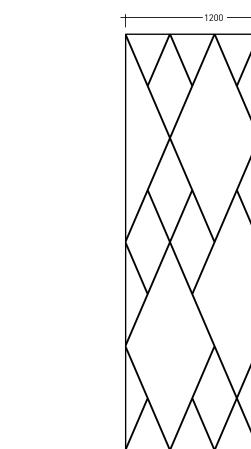



ARCHISONIC® is a high-performancesustainable acoustic absorber made from upcyled plastic bottles which is Cradle to Cradle certified and LEED accredited.

ARCHISONIC® is manufactured at the highest quality standards, yet slight color and surface deviations caused by the high degree of recycled fiber are an inevitable part of the product characteristics and do not claim warranty services.

Material varies in colour when shown in monitor or in print. Please request a material sample to verify colours.


QUIET NEUTRALS

24 mm




WARM NEUTRALS

24 mm

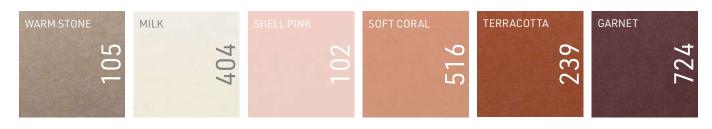


LIVING GREENS

24 mm

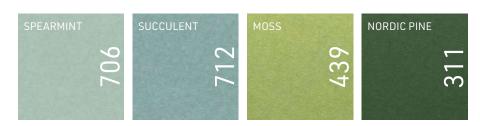

ELEMENTAL BLUES

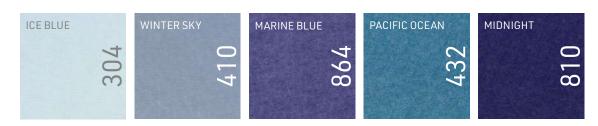

SOOTHING PASTELS

24 mm




ELEGANT DARKS

24 mm



ENERGETIC BRIGHTS

24 mm

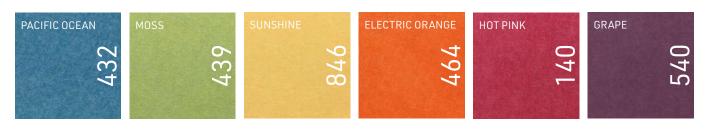

PRIMARY PLAY



DIMENSIONS

ARCHISONIC® 24 mm 1800 x 2400 x 24 mm (70" x 94" x 0.94") ARCHISONIC® 12 mm 1200 x 2800 x 12 mm (47" x 10" x 0.47")

COMPOSITION

100% PET (min. 60% post-consumer)

FIRE TEST

DIN EN 13501-1 B-s1, d0 ASTM E-84 Class A

VOC EMISSION

CDPH 01350 Pass

ISO 16000 (CDPH/EHLB/Standard Method V1.2.)

EN 16516

COLOUR FASTENESS

EN ISO 105-B02, A1 Grade 6


SOUND ABSORPTION

DIN ISO 11654

24 mm aw 0.55 (no airgap)

aw 0.65 (50 mm / 2" air gap) aw 0.90 (100 mm / 4" air gap) aw 0.95 (200 mm / 8" air gap) aw 0.95 (300 mm / 11" air gap).

12 mm aw 0.30 (no air gap)

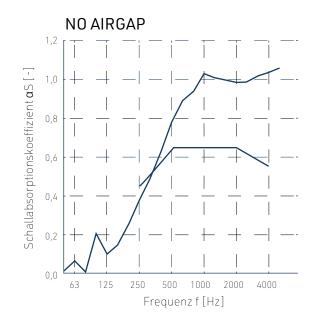

MATERIAL REUTILISATION

ARCHISONIC® 24 mm 88 plastic bottles/m² ARCHISONIC® 12 mm 53 plastic bottles/m²

ENVIRONMENTAL

Cradle to Cradle Certified™ Product qualifies for LEED v4 specifications on VOC emissions in LEED EQ credit (Low-emitting products)

SUPPORTED BY

Climate KIC











IMPACT ACOUSTIC®

TABULA Wall Tile



TECHNICAL DATA SHEET

TABULA 24MM

Wall Tile

TABULA's room-high elements are suitable for cladding walls over their entire surface. Monotone or selection of colours, TABULA works with any room and wall types. The nature of its flexibility makes it a cost-effective acoustic solution.

ARTICLE NUMBER


731.24.10.000.00

DIMENSIONS

Lenght: 150mm 5.90" Width: 2400 mm 94.48" Thickness: 24mm 0.94"

CONNECTION

TABULA is mounted on the wall with a biodegradable double-contact glue.

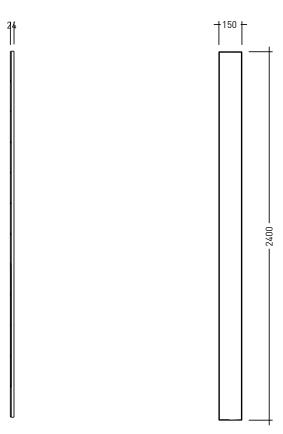

TABULA 24MM

Wall Tile

TABULA's room-high elements are suitable for cladding walls over their entire surface. Monotone or selection of colours, TABULA works with any room and wall types. The nature of its flexibility makes it a cost-effective acoustic solution.

ARTICLE NUMBER


731.24.11.000.00

DIMENSIONS

Lenght: 300mm 11.81" Width: 2400 mm 94.48" Thickness: 24mm 0.94"

CONNECTION

TABULA is mounted on the wall with a biodegradable double-contact glue.

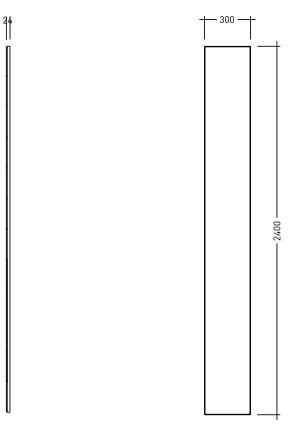

TABULA 24MM

Wall Tile

TABULA's room-high elements are suitable for cladding walls over their entire surface. Monotone or selection of colours, TABULA works with any room and wall types. The nature of its flexibility makes it a cost-effective acoustic solution.

ARTICLE NUMBER

731.24.11.000.00


DIMENSIONS

Lenght: 600mm 23.62" Width: 2400 mm 94.48" Thickness: 24mm 0.94"

CONNECTION

TABULA is mounted on the wall with a biodegradable double-contact glue.



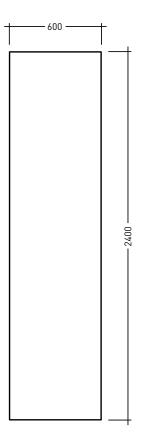

TABULA 12MM

Wall Tile

TABULA's room-high elements are suitable for cladding walls over their entire surface. Monotone or selection of colours, TABULA works with any room and wall types. The nature of its flexibility makes it a cost-effective acoustic solution.

ARTICLE NUMBER


731.12.10.000.00

DIMENSIONS

Lenght: 150mm 5.90" Width: 2800 mm 110.23" Thickness: 12mm 0.47"

CONNECTION

TABULA is mounted on the wall with a biodegradable double-contact glue.

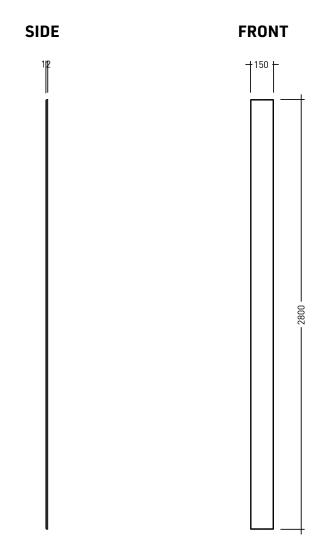

TABULA 12MM

Wall Tile

TABULA's room-high elements are suitable for cladding walls over their entire surface. Monotone or selection of colours, TABULA works with any room and wall types. The nature of its flexibility makes it a cost-effective acoustic solution.

ARTICLE NUMBER


731.12.11.000.00

DIMENSIONS

Lenght: 300mm 11.81" Width: 2800 mm 110.23" Thickness: 12mm 0.47"

CONNECTION

TABULA is mounted on the wall with a biodegradable double-contact glue.

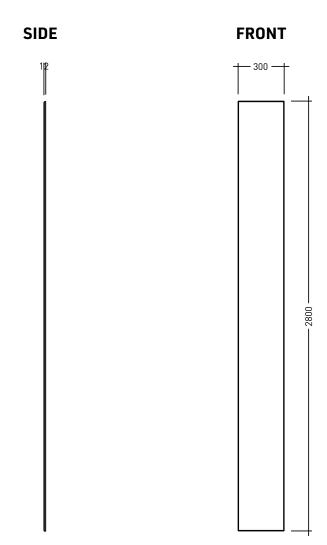

TABULA 12MM

Wall Tile

TABULA's room-high elements are suitable for cladding walls over their entire surface. Monotone or selection of colours, TABULA works with any room and wall types. The nature of its flexibility makes it a cost-effective acoustic solution.

ARTICLE NUMBER


731.12.12.000.00

DIMENSIONS

Lenght: 600mm 23.62" Width: 2800 mm 110.23" Thickness: 12mm 0.47"

CONNECTION

TABULA is mounted on the wall with a biodegradable double-contact glue.

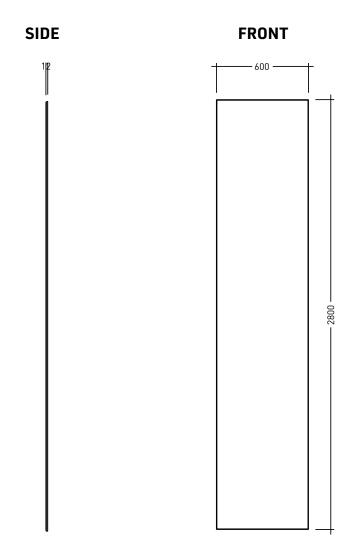



 $\label{eq:accustor} ARCHISONIC^{\textcircled{0}} is a high-performance sustainable acoustic absorber made from upcyled plastic bottles which is Cradle to Cradle certified and LEED accredited.$

ARCHISONIC® is manufactured at the highest quality standards, yet slight color and surface deviations caused by the high degree of recycled fiber are an inevitable part of the product characteristics and do not claim warranty services.

Material varies in colour when shown in monitor or in print. Please request a material sample to verify colours.


QUIET NEUTRALS

24 mm




WARM NEUTRALS

24 mm

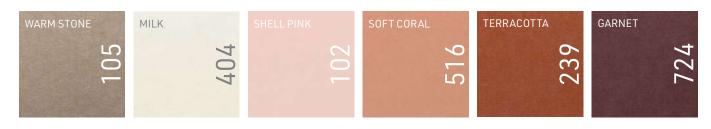

LIVING GREENS

24 mm

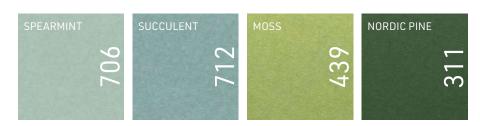

ELEMENTAL BLUES



TECHNICAL DATA SHEET

SOOTHING PASTELS

24 mm




ELEGANT DARKS

24 mm



ENERGETIC BRIGHTS

24 mm

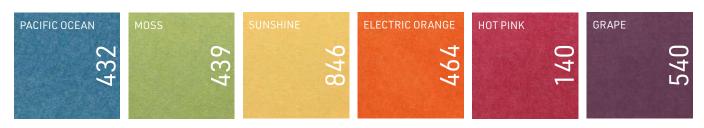

PRIMARY PLAY



DIMENSIONS

ARCHISONIC® 24 mm 1800 x 2400 x 24 mm (70" x 94" x 0.94") ARCHISONIC® 12 mm 1200 x 2800 x 12 mm (47" x 10" x 0.47")

COMPOSITION

100% PET (min. 60% post-consumer)

FIRE TEST

DIN EN 13501-1 B-s1, d0 ASTM E-84 Class A

VOC EMISSION

CDPH 01350 Pass

ISO 16000 (CDPH/EHLB/Standard Method V1.2.)

EN 16516

COLOUR FASTENESS

EN ISO 105-B02, A1 Grade 6


SOUND ABSORPTION

DIN ISO 11654

24 mm aw 0.55 (no airgap)

aw 0.65 (50 mm / 2" air gap) aw 0.90 (100 mm / 4" air gap) aw 0.95 (200 mm / 8" air gap) aw 0.95 (300 mm / 11" air gap).

12 mm aw 0.30 (no air gap)

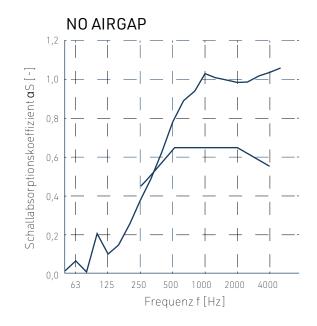

MATERIAL REUTILISATION

ARCHISONIC® 24 mm 88 plastic bottles/m² ARCHISONIC® 12 mm 53 plastic bottles/m²

ENVIRONMENTAL

Cradle to Cradle Certified™ Product qualifies for LEED v4 specifications on VOC emissions in LEED EQ credit (Low-emitting products)



Climate KIC









